

1-11-81
MAIN/DDS/th
6240

From: Commanding General
To: Commandant of the Marine Corps (Code LFF-2)
Subj: Pollution Abatement Related to Past Hazardous Material Disposal
Aboard Marine Corps Base, Camp Lejeune
Ref: (a) FONECOM btwn Mr. Paul Mubbell, CMC (Code LFF-2), and Mr. Danny
Sharpe, BMainD, on 8 Dec 1981
(b) OIC, NEESA, ltr 112N/WSE/pn 11100/1:273A Ser 1754 of 18 Dec 1981
Encl: (1) CG, MCB, ltr MAIN/DDS/th 6240 of 27 Aug 1981
(2) Input for Pollution Control Report

1. The purpose of this letter is to identify an environmental concern having potential for adverse public reaction/controversy. Enclosures (1) and (2) provide background on recent actions involving an abandoned chemical landfill located aboard Marine Corps Base, Camp Lejeune where the subject disposal was accomplished. The subject situation was discussed with Headquarters Marine Corps Environmental personnel during reference (a).

2. This command is concerned that the MACIP, discussed in reference (b) and enclosure (1), will not address the subject issue in a timely manner.

3. Enclosure (2) outlines a proposed course of action to accelerate assessment and corrective action related to the chemical landfill site.

4. It is requested that guidance be provided regarding this matter. The point of contact is Mr. Danny Sharpe, Base Maintenance Division, (AUTOVON) 484-5003.

CLW

000005816

MAIN/DDS/th
6240

AUG 27 1981

Mr. Charles E. Rundgren
Water Supply Branch
Sanitary Engineering Section
Division of Health Services
Post Office Box 2091
Raleigh, North Carolina 27602

Dear Mr. Rundgren:

The purpose of this letter is to provide follow-up information to telephone calls made to your agency on 25 August 1981 concerning the Camp Lejeune Chemical Landfill and the potable water system at the Rifle Range. Attached are results of laboratory analyses of water samples collected in the vicinity of the landfill and from the Rifle Range potable water system. Also attached is a map showing the locations of the landfill, the Rifle Range and the sample collection points.

Although use of the landfill was discontinued several years ago, concern regarding potential discharges from the landfill arose recently as a result of the implementation of federal and state hazardous waste regulations promulgated under the Resource Conservation and Recovery Act. At that time, this Command requested technical assistance from the Atlantic Division of the Naval Facilities Engineering Command, Norfolk, Virginia (LANTNAVFACENGCOM).

Based on the laboratory analyses mentioned above and on-site inspections of the landfill and the Rifle Range water system, LANTNAVFACENGCOM officials have concluded that the Rifle Range drinking water meets current drinking water standards, however, they recommended that careful monitoring continue. The Camp Lejeune Rifle Range water system has been included in a monthly trihalo-methanes monitoring program. Since test well and surface water data from samples near the landfill, especially test well 16 and sample point number 5, indicate significant levels of contamination, this Command made a decision to notify both the general public and appropriate state agencies of this potential problem.

LANTNAVFACENGCOM has advised that Marine Corps Base Camp Lejeune is scheduled for FY-82 Initial Assessment Study (IAS) in the Navy Assessment and Control of Installation Pollutants (NACIP) Program. The IAS is the first phase in a program to identify, assess and control the contamination of the environment from past hazardous waste disposal operations at Navy and Marine Corps activities.

Questions regarding this matter should be directed to the Base Maintenance Officer, Marine Corps Base, Camp Lejeune, North Carolina, telephone (919) 451-2511.

Sincerely,

CLW

000005817

C. G. COOPER
Major General, U. S. Marine Corps
Commanding

Encls

ENCLOSURE (1)

ALL RESULTS IN PARTS PER BILLION (ppb)

	RR-45 WELL	RR-47 WELL	RR-97 WELL	RR-85 WTP FINISHED WATER TAP	SAMPLE POINT NO. 7*	SAMPLE POINT NO. 8*
BENZENE						
TOLUENE						
CARBON TETRACHLORIDE						
1, 2 - DICHLOROETHANE						
1, 1, 1 - TRICHLOROETHANE						
1, 1 - DICHLOROETHANE						
1, 1 - DICHLOROETHYLENE						
1, 1, 2 - TRICHLOROETHANE						
CHLOROFORM			17	17		
ETHYLENE CHLORIDE	4		6	3		
TETRACHLOROETHYLENE						
TRICHLOROETHYLENE			2			

The above chart summarizes data from analysis run on water samples collected at locations indicated on Map shown on page 4. Pages 5 and 6 outline the parameters tested for and detection limits. Analysis sheets similar to those on pages 5 and 6 are available for each sampling point. Analyses were conducted by Jennings Laboratory, Inc., 1118 Cypress Avenue, P. O. Box 854, Virginia Beach, Virginia 23451, phone (804) 425-1498.

CLW

000005818

MCB CAMP LEJEUNE
 SAMPLE DATE 10 APRIL 1981
 ALL RESULTS IN PARTS PER BILLION (ppb)


	TEST WELL NO. 15	TEST WELL NO. 16	Sample Point No. 3 Pool of Water Below Well No. 16	Sample Point No. 4 POOL	SAMPLE POINT NO. 5*	SAMPLE POINT NO. 6*
BENZENE					1	
TOLUENE		52			101	
PERCHLORON TETRACHLORIDE						
1, 2 - DICHLOROETHANE		52			176	
1, 1, 1 - TRICHLOROETHANE					103	
1, 1 - DICHLOROETHANE		38		2	101	
1, 1 - DICHLOROETHYLENE		74			258	
1, 1, 2 - TRICHLOROETHANE					252	
CHLOROFORM					35	
METHYLENE CHLORIDE	2	13	3	2	37	14
TETRACHLOROETHYLENE						6
TRICHLOROETHYLENE					141	

The above chart summarizes data from analysis run on water samples collected at locations indicated on map shown on page 4. Pages 5 and 6 outline the parameters tested for and detection limits. Analysis sheets similar to those on pages 5 and 6 are available for each sampling point. Analyses were conducted by Jennings Laboratory, Inc., 1118 Cypress Avenue, P. O. Box 854, Virginia Beach, Virginia 23451, phone (804) 425-1498.

CLW
 000005819

SCALE 1:50000

303

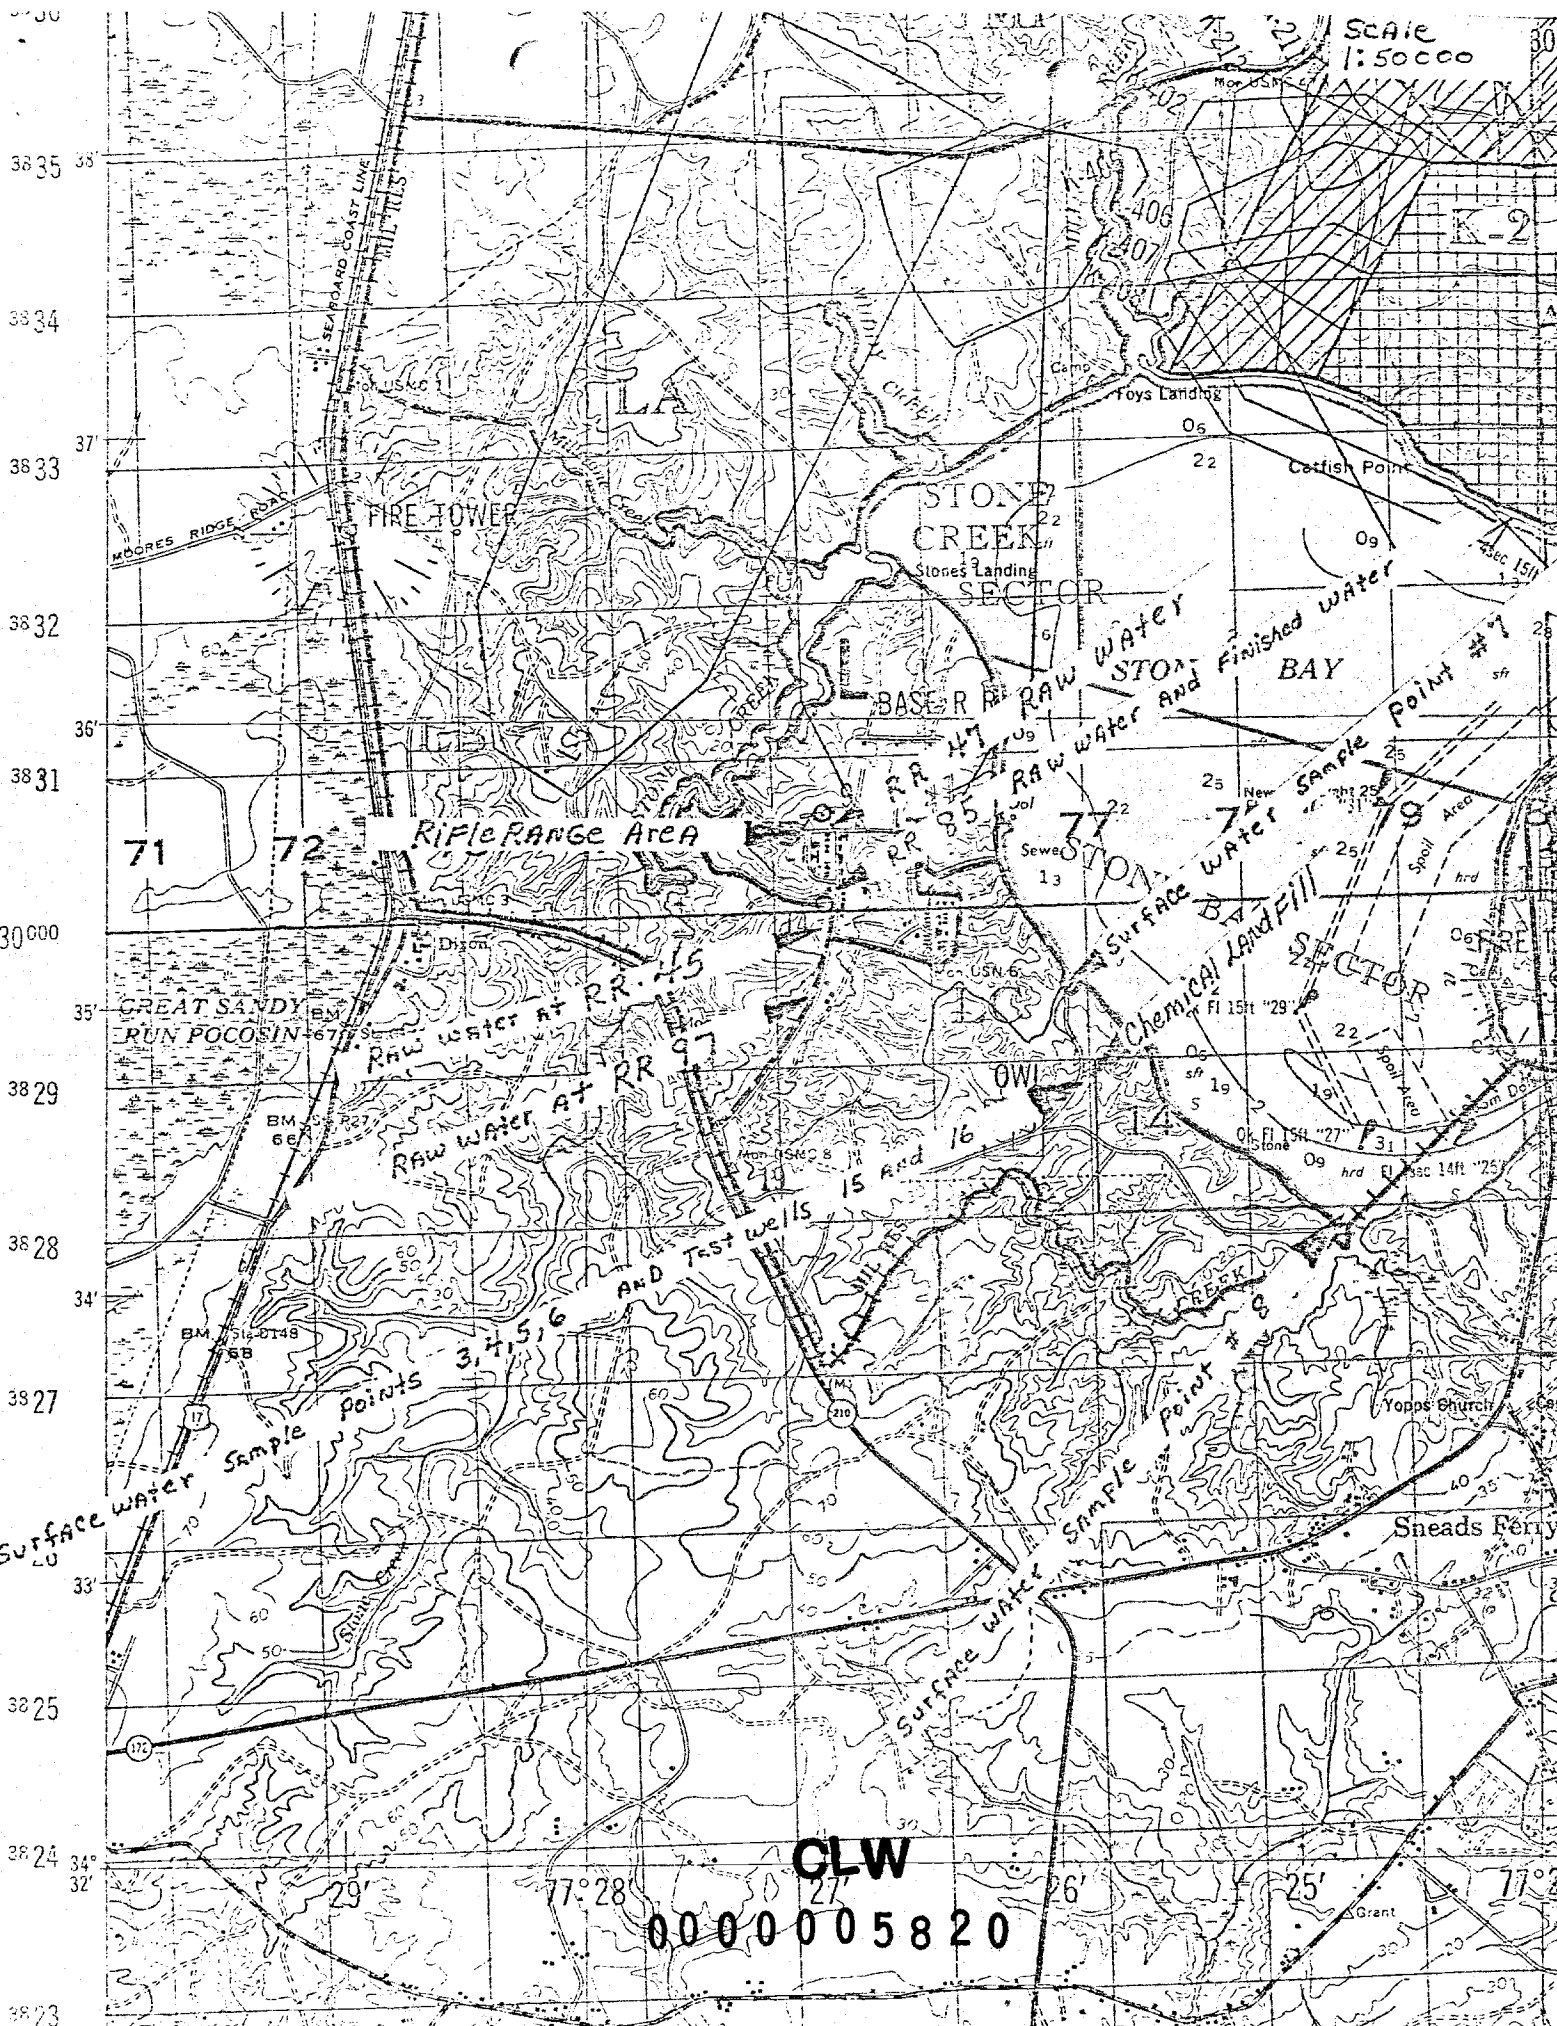

71

72

Rifle Range Area

STONE CREEK SECTOR

RAW WATER

RAW WATER AND Finished water

SURFACE WATER

Chemical Landfill

SECTOR

RAW WATER AT RR 15

RAW WATER AT RR 16

AND Test wells 15 and 16

Sample points 3, 4, 5, 6

Sample point # 8

Sample Point # 9

CLW

000005820

Grant

Sneads Ferry

Yopps Church

OWI

14

13

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

JENNINGS LABORATORIES, INC.

ANALYTICAL AND CONSULTING CHEMISTS

1118 CYPRESS AVENUE • P. O. BOX 851 • VIRGINIA BEACH, VA. 23451 • PHONE (804) 425-1498

VA (EPA) CERTIFIED LABORATORY for
Drinking Water Analysis - Microbiological,
Inorganic and Organic

ASBESTOS ANALYSIS - NIOSH 582

Official Reference Chemists for:
AMERICAN OIL CHEMISTS SOCIETY

NATIONAL SOYBEAN
PROCESSORS ASSOCIATION

Laboratory Certified by VA. STATE WATER
CONTROL BOARD for Analysis of
Effluents for NPDES PERMITS
CERTIFIED OFFICIAL U.S.D.A. LABORATORY
FOR MEAT ANALYSIS

CERTIFICATE OF ANALYSIS

TO: Mr. Dave Goodwin
Building N-23 Atlantic Division
Naval Facilities Engineering Command,
Norfolk, Virginia 23511

DATE: May 29, 1981

SAMPLE OF FINISHED WATER #1
MARKED MCB CAMP LEJEUNE - Rifle Range Water Treatment Plant taken 5/20/81 Grab
Sample picked up 5/21/81 by JENNINGS LABORATORIES, INC. Total Cl 1.3 ppm
OFFICIAL SAMPLE BY: P. A. Rakowski


PRIORITY POLLUTANTS	PURGEABLE ORGANICS	DETECTION LIMITS	µg/.
Acrolein	None Detected	2.0	
Acrylonitrile	None Detected	2.0	
Benzene	None Detected	10.0	
Toluene	None Detected	10.0	
Ethylbenzene	None Detected	10.0	
Carbon Tetrachloride	None Detected	.007	
Chlorobenzene	None Detected	.03	
1,2-Dichloroethane	None Detected	.006	
1,1,1-Trichloroethane	None Detected	.005	
1,1-Dichloroethane	3.40 ppb	.004	
1,1-Dichloroethylene	None Detected	.006	
1,1,2-Trichloroethane	None Detected	.006	
1,1,2,2-Tetrachloroethane	None Detected	.006	
Chloroethane	None Detected	.01	
2-Chloroethyl vinyl ether	None Detected	.08	

CLW

Respectfully submitted,
JENNINGS LABORATORIES, INC.

0000005821

Laboratory
Analysis No. 243



JENNINGS LABORATORIES, INC.

PRIORITY POLLUTANTS	CONCENTRATION	DETECTION LIMITS	µg/l
Chloroform	94.40 ppb		.010
1,2-Dichloropropane	None Detected		.004
1,3-Dichloropropane	None Detected		.006
Methylene Chloride	4 ppb		.010
Methyl Chloride	None Detected		.009
Methyl Bromide	None Detected		.03
Bromoform	None Detected		.02
Dichlorobromomethane	None Detected		.006
Trichlorofluoromethane	None Detected		.03
Dichlorodifluoromethane	None Detected		.01
Chlorodibromomethane	None Detected		.01
Tetrachloroethylene	None Detected		.007
Trichloroethylene	None Detected		.005
Vinyl Chloride	None Detected		.01
1,2-trans-Dichloroethylene	None Detected		.006
bis(chloromethyl) ether	None Detected		.003

BASE/NEUTRAL EXTRACTABLE ORGANIC COMPOUNDS

1,2-Dichlorobenzene		.04
1,3-Dichlorobenzene		.04
1,4-Dichlorobenzene		.04
Hexachloroethane		.001
Hexachlorobutadiene		.001
Hexachlorobenzene		.002
1,2,4-Trichlorobenzene		.006
Bis(2-Chloroethoxy)methane		.40
Naphthalene		.04
2-Chloronaphthalene		.04
Isophorone		5.0
Nitrobenzene		5.0
2,4-Dinitrotoluene		.06
2,6-Dinitrotoluene		.06

CLW

000005822

W. S. Jennings

1. Facility: Marine Corps Base
Address: Camp Lejeune, North Carolina
County: Onslow
2. Specific Type of Pollution: Miscellaneous types of hazardous materials/wastes.
3. Amount of Pollution: Undetermined at this time.
4. Pollution Source and Discharge, Emission or Deposit Site:

Leachate from inactive chemical landfill located approximately 1800 meters north west of the confluence of Everetts Creek and New River and 300 meters west of New River shoreline.
5. Existing Treatment and Other Control Measures:

Three existing monitoring wells located at the site are periodically sampled and analysis performed. No remedial/abatement facilities/actions are in place or programmed.
6. Effectiveness of Existing Treatment and Control:

Adequacy of monitoring wells cannot be documented. Hydrological conditions at the site and hydrological relationships between the site and surrounding potable water wells/supplies are unknown.
7. Remedial Measures Proposed and Estimated Effect on Correcting Problem:

Provide the following: (a) Hydrological/engineering evaluation of the site, potentially affected ground/surface water supplies; and adequacy of existing monitoring program. (b) Design and construction of additional monitoring facilities/wells if required. (c) Develop baseline data for groundwater quality at the problem site.
8. Applicable Standards:
 - a. Comprehensive Environmental Response, Compensation and Liability Act of 1980.
 - b. Resource Conservational Recovery Act Regulations.
9. Project Schedule:

To be determined.
10. North Carolina Public Health Agency has been advised of the potential problem and supplied with available monitoring data. The general public was advised by a news release. The site was identified to the EPA as required by the Comprehensive Environmental Response Compensation and Liability Act of 1980.

CLW

0000005823